



ADELIA RECESSED LED PANEL

INDOOR COMMERCIAL LED LIGHTING

IP40



LED TECHNICAL DATA

- Light source: Linear LED Light Engine.

Wattage (W)	Total Luminous Flux (lm)	Efficacy (lm/W)	Colour Temperature (K)	Nett Weight (kg)
Double Panel				
35W	4384 lm	124 lm/W	4000K	5kg
Tripple Panel				
53W	6575 lm	124 lm/W	4000K	6kg

- LED life cycle: 50 000 hours
- Colour Rendering Index: >80 CRI

LUMINAIRE TECHNICAL DATA

- IP rating: IP40
- Housing material: White epoxy powder coated sheet metal housing.
- Diffuser: Opalized acrylic diffuser UV stabilised and impact-resistant.
- Available in emergency back-up (EMG), DALI (DALI), (EMG + DALI)
- Mounting: Recessed
- Operating temperature: -20°C to +40°C.
- Insulation classification: Class1
- Wiring: Supplied with a power cable inclusive of a molded 5 amp plug top
- Power supply: 220V to 240V AC 50/60 Hz.

APPLICATION

- Office lighting
- Hallway and corridor lighting
- Indoor commercial applications
- Public applications
- Storage lighting
- Retail applications


COMPLIANCE STANDARD

- SANS / IEC Certification Pending

WARRANTY

- 12 month warranty on luminaire body
- 5 year warranty on internal components.

PHOTOMETRIC DIAGRAM (IES files available on request)

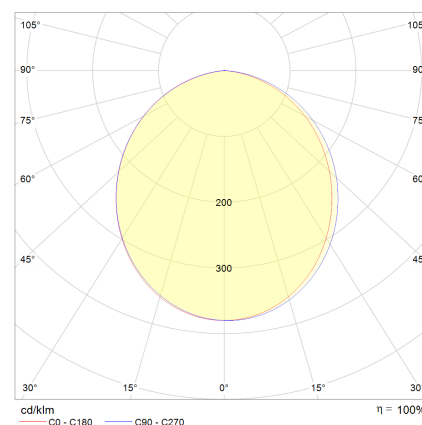

DIMENSIONS

